

NEW

PUSH-PUCK

The Push-Puck, a versatile 24V LED puck, features Touch Tune technology, push-to-change CCT for effortless color temperature adjustment, and delivers precise, high-quality illumination for recessed or surface-mounted applications.



COLOR SELECT



DRY



TOUCH TUNE




VOLTAGE



Intertek

4024S-CC

4024R-CC

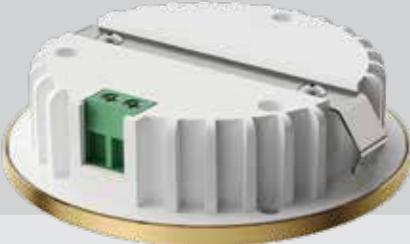


Single-Wire Connection

Simplifies installation with a one-wire quick-connect system, no errors, clean and effortless setup.


Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
4024R-CC	Ø2-1/2"	4 W	210 lm	90	2700 K/ 3000 K/ 3500 K/ 4000 K/ 5000 K	24 V
4024S-CC	Ø2-1/2"	4 W	210 lm			

4024R-CC

Ø2.375"

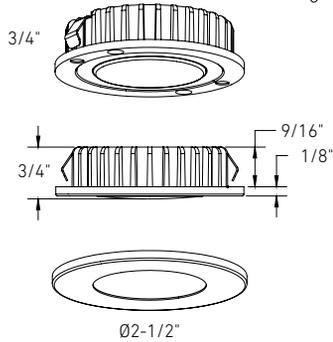

4024S-CC

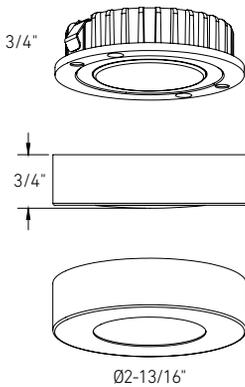

Specifications

- Requires 24 VDC LED power supply and wiring (sold separately)
- Recessed or surface mount installation
- Push-selectable CCT
- Single-wire quick-connect system for clean, error-free installation
- Smooth 360° wide spread
- 5-year warranty

Power supplies: plug-in

- COBTP24V-ETR30**
24 VDC/30W class 2 LED driver
- COBTP24V-ETR60**
24 VDC/60W class 2 LED driver

Power supplies: hard-wired

- DD2448**
2-in-1 24V driver and dimmer
- DR2412DIM, DR2424DIM, DR2448DIM**
DR2460DIM DR2496DIM
24V dimmable hardwired drivers
(12W, 24W, 48W, 60W, 96W)

Power supplies: compact hard-wired

- PLD2412DIM, PLD2424DIM, PLD2448DIM**
24V compact dimmable hardwired drivers
(12W, 24W, 48W)

Accessories

- UCBL-20-18, UCBL-50-18, UCBL-100-18**
18-gauge connection wire (20 ft, 50 ft, 100 ft)

Finish

- **BK** Black
- **GD** Gold
- **SN** Satin Nickel
- **WH** White

Note

Plug-in or hard-wired power supply required for installation. Sold separately.
Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.