

NEW

PILLAR

Completing the Pillar family, the 24" wall-mounted version extends Pillar's design language outdoors. Sharing the same sculptural aesthetic, this model is built for exterior environments while remaining suitable for indoor installation.



PILW24-CC-UNV

Selectable Light Direction
Easily choose between up light, down light, or both with a built-in switch.



COLOR SELECT



WET

**T24
JA8**
CERTIFIED



UNIVERSAL DRIVER



REPLACEABLE DRIVER




SELECTABLE LIGHT DIRECTION



Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage ⚡
PILW24-CC-UNV	24"	60 W	3500 lm	90	2200, 2700, 3000, 3500, 4000 K	120 / 277 / 347V Triac, ELV, and 0-10V dimming



PILW24-CC-UNV

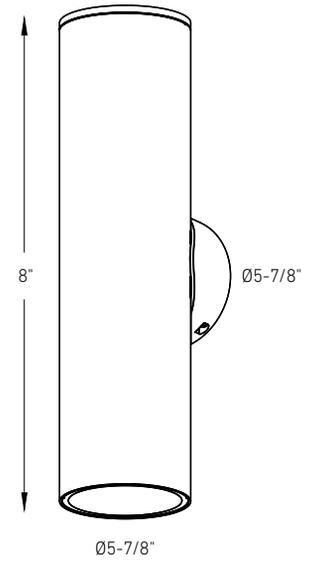

Specifications

- Switch-selectable CCT
- 36° beam angle
- Replaceable driver
- Universal voltage: 120V, 277V, or 347V input with TRIAC, ELV, and 0–10V dimming
- Mounts on a 4" octagon junction box
- Selectable Light Direction. Easily choose between up light, down light, or both with a built-in switch
- 5-year warranty

Finish

- **BK** Black

Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.