



# DALS LIGHTING

Canada  
80, de la Seigneurie blvd., E.  
Blainville, Quebec j7C 4N1

U.S.A.  
4383, NW 124th Ave.,  
Coral Springs, Florida 33065

877.430.1818  
info@dals.com  
dals.com

**MODEL** PILW24-CC-UNV

**NAME** Pillar

24" round wall sconce

Completing the Pillar family, the 24" wall-mounted version extends Pillar's design language outdoors. Sharing the same sculptural aesthetic, this model is built for exterior environments while remaining suitable for indoor installation.


**PROJECT**

**TYPE**


**DATE**

**QTY**

**NOTES**

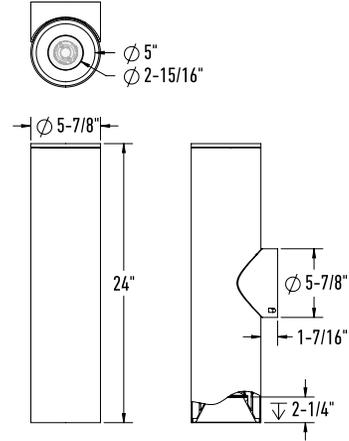

### LIGHT DISTRIBUTION

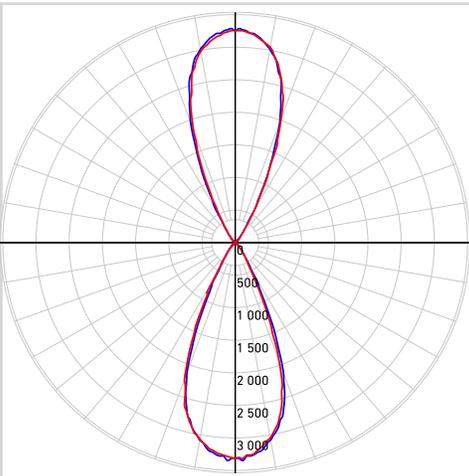

\*Lumen output measured at 3000k

### QUICK SPECS

<b>Size</b>	24"
<b>Watts (W)</b>	120-277v: 56w / 347v: 60w
<b>Delivered lumens*</b>	3500
<b>CRI</b>	90
<b>Voltage (v)</b>	120/277/347
<b>Beam angle (deg)</b>	45
<b>Mounting</b>	Screwed in
<b>Lifespan (hrs)</b>	50 000
<b>Binning</b>	5 SDCM
<b>LED model</b>	COB
<b>Light direction</b>	Up and Down
<b>Color temperature</b>	2200K/2700K/3000K/3500K/4000K

### ELECTRICAL DETAILS

<b>Environment</b>	Wet
<b>Location</b>	Indoor/Outdoor
<b>Operating temp. (° C)</b>	-38 to 58
<b>IP rating</b>	IP54
<b>Input voltage (V)</b>	120-347V
<b>Output voltage (V)</b>	36V
<b>Output current (mA)</b>	600
<b>Power factor</b>	98
<b>Driver type</b>	Constant current
<b>THD</b>	≤20%
<b>Certifications</b>	ETL, FCC, ICES, T24/JA8

### ORDERING GUIDE

PILW24-CC-UNV - Finish

**BK** - Black

### CONSTRUCTION

<b>Lens material</b>	PC
<b>Lens type</b>	Reflector
<b>Finish type</b>	Powder coated
<b>Housing material</b>	Aluminum

WHAT'S IN THE BOX	ACCESSORIES	ADAPTORS
<ul style="list-style-type: none"> <li>LED flush mount fixture</li> <li>Mounting bracket</li> <li>Mounting hardware</li> <li>Wire nuts</li> <li>Instruction sheet</li> </ul>		

#### RECOMMENDED DIMMER LIST\*

BRAND	MODEL	DIMMER SPECS	GRADE	DIMMING RANGE %		MAX LOAD
				MIN	MAX	
Dals	SM-DIMSW Smart Dimmer*	Triac, 250W LED/CFL	Compatible	1	100	4
Lutron	DVCL-153PR-WH-C*	Triac, 150 W Dimmable CFL/LED	Compatible	1	100	2
Lutron	CTCL-153PDH-WH-C*	Triac, 150 W Dimmable CFL/LED	Compatible	1	100	2
Lutron	STCL-153PH-WH-C*	Triac, 150 W Dimmable CFL/LED	Compatible	1	100	2
Lutron	DVLV-600P-BL	Magnetic Low Voltage, 450W	Compatible	1	100	7
Lutron	MACL-153MRHW-WHC*	Triac, 150 W Dimmable CFL/LED	Compatible	0	92	2
Lutron	DVELV-300P-WH	300W electronic low voltage dimmer	Compatible	1	85	5
Lutron	Caseta PD-6WCL-WH-R-C*	Triac, 300W Dimmable CFL/LED	Compatible	1	100	2
Lutron	Caseta PD-10NXD-WH*	Triac, LED—up to 250 W	Compatible	0	97	4
Leviton †	6672-1LW	Triac, 150W Dimmable CFL/LED	Compatible	2	100	2
Leviton	DSM10-1LZ*	Triac, 450W Dimmable CFL/LED	Compatible	1	100	7
Leviton	6674*	Triac, 150 W Dimmable CFL/LED	Compatible	1	100	2
Leviton	PL06-10Z*	Triac, 150 W Dimmable CFL/LED	Compatible	1	100	2
Leviton	DSL06-1LZ*	Triac, 300 W Dimmable CFL/LED	Compatible	1	100	5
Leviton	D26HD-742-1RW*	Triac, 300W LED/CFL	Compatible	1	100	5
Legrand	RHCL453PNICCV4*	Triac, 450W Dimmable CFL/LED	Compatible	1	100	7
Legrand	ADTP703TUM4*	Triac, 450W Dimmable CFL/LED	Compatible	0	100	7
Legrand	ADPD453LM2*	Triac, 450W Dimmable CFL/LED	Compatible	1	100	7
Control 4	C4-FPD120-WH	Triac, 200W LED	Compatible	0	100	3
TP-Link	HS220*	Triac, 150 W, Dimmable LED (MLV)	Compatible	1	100	2
Leviton	RDL06-10Z	Triac, 150W LED & CFL	Compatible	1	100	2
Lutron	DVSTV (0–10 V Controls)*	960W, 8A, 120–277 V	Compatible	0	100	15
Leviton	IP710-LFZ (0–10 V Controls)	1200VA, 10A LED, 120-277V	Compatible	0	100	18
Leviton	ZS057-30Z (0-10 V Controls)	1388VA, 347VAC / 4A	Compatible	0	100	12
Lutron	RMJS-8T-DV-B (0-10 V Controls)	120 / 277V, 8A,	Compatible	0	100	15

#### WARRANTY

DALS offers a 5-year warranty from the date of purchase which covers repairs or replacement of defective parts of the housing, optics, and electronics. To contact DALS customer service call 1-877-430-1818 or send an e-mail to [info@dals.com](mailto:info@dals.com).